

# LARGE CAPACITY/VOLUME HOSE REELS 1195 SERIES

**COXREELS® 1195 Series** motor driven hose reels are designed to handle long lengths of large diameter hose for increased volume delivery. Coxreels' exclusive low profile outlet riser and open drum design provide a noncrimping, flat smooth hose wrap. The sturdy all welded "A" frame base provides exceptional strength to handle the extra weight without sacrificing performance, even in demanding mobile applications.

## 1195 SERIES MODELS - ALL REELS SUPPLIED LESS HOSE

MODEL	LESS HOSE						INLET SWIVEL & OUTLET RISER	BAR	Kg.	SIZE INDEX
	STANDARD CAP			OPTIONAL CAP. Reducer required						
	I.D. mm	O.D. mm	LENGTH m	I.D. mm	O.D. mm	LENGTH m				
<b>1195-932-X</b>	51	65	15	38	52	18	51 mm F NPT	41	58	<b>1</b>
<b>1195-1332-X</b>	51	65	23	38	52	30	51 mm F NPT	41	67	<b>3</b>
<b>1195-2032-X</b>	51	65	35	38	52	46	51 mm F NPT	41	84	<b>5</b>
<b>1195-1728-X</b>	51	65	18	38	52	26	51 mm F NPT	41	61	<b>2</b>
<b>1195-2428-X</b>	51	65	27	38	52	41	51 mm F NPT	41	77	<b>4</b>
<b>1195-3228-X</b>	51	65	38	38	52	53	51 mm F NPT	41	99	<b>6</b>


### - SUFFIX "X" OPTIONS

These models are not available in direct hand crank models. When ordering, substitute the "X" with selection below. Add 2 Kg to ship weight if reel is crated.

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. Kg*
<b>AB</b>	AIR - #6 GAST	COMP. AIR MOTOR	4
<b>EB</b>	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	12
<b>ED</b>	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	12
<b>EA</b>	ELEC. - EXPL. PRF. - 115V	1/2 HP REW., AC REV. TYPE	12
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	3
<b>C</b>	FRONT HAND CRANK	BEVEL GEARED CRANK	1

### REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W mm	H mm	L mm	X mm	Y mm	Ø mm	Dw mm
<b>1</b>	578	845	813	381	651	394	241
<b>2</b>	845	768	711	648	622	394	445
<b>3</b>	679	845	813	483	651	394	343
<b>4</b>	946	768	711	749	622	394	610
<b>5</b>	781	845	813	584	651	394	508
<b>6</b>	1149	768	711	953	622	394	813

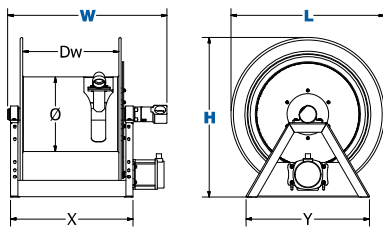

### 1195 SERIES :: REEL SPECIFICATIONS

#### SWIVEL

- External fluid path with electroless nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: VITON®

#### DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Robust lubricated horizontal surface mount bearings for easy rotation
- Adaptor for Victaulic connections available, consult factory
- Adjustable tension brake to prevent "free-wheeling" during operation

#### RETRACTION

- Reliable chain & sprocket drive on motor driven models
- Bevel geared crank rewind (On models with suffix -C) See Motor Options Chart

#### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

#### POSSIBLE FIELDS OF APPLICATION

- High Volume Delivery
- Bulk Liquid Handling
- Water Trucks
- Mining Operations
- Construction Sites
- Farming
- Chemical Fluid Transfer
- Aviation Refueling
- Fuel Trucks

#### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

MOTORIZED

HAND CRANK

